


CATALOG

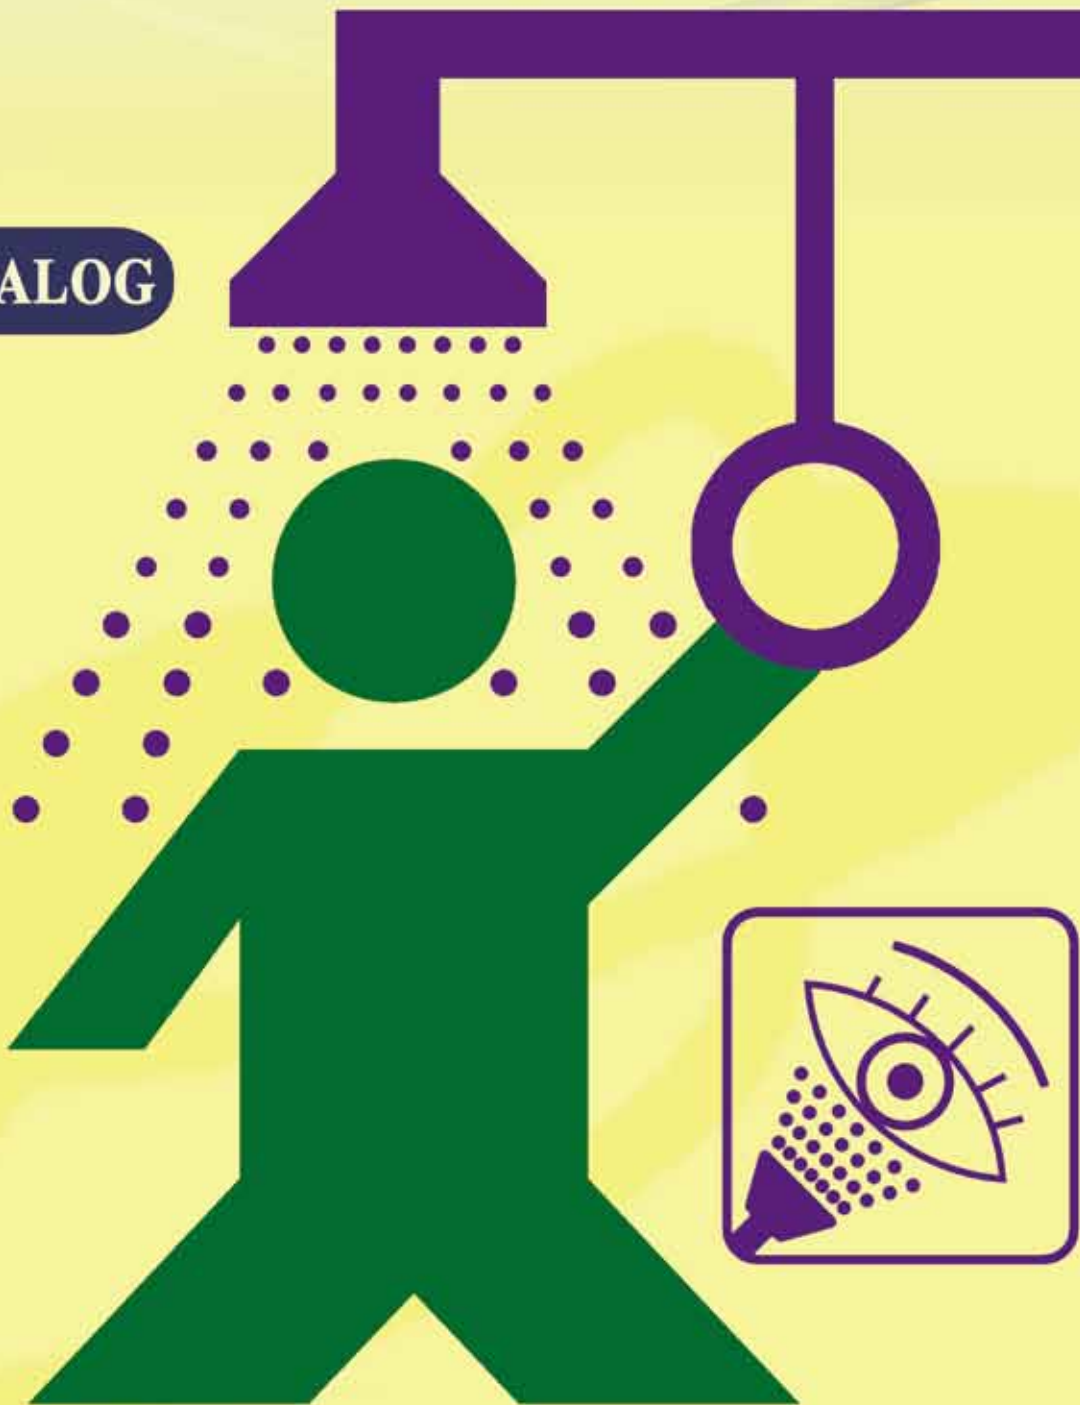

# EMERGENCY SHOWER & EYEWASH

Dealing with the environments of workplace or laboratory offers the equipment of safety protection in emergency shower which insures the security of operators with a design of flooding shower so that operators alleviate cause to chemical, fire and dust....as injured accidents. The emergency shower is the best of safety products for workers in workplace and public place.

### ■ Features

- \* In special parts and whole design supply flooding shower for use immediately to alleviate injured people in body as well as eyes, achieving the best of protection.
- \* All tubes of the equipment are made SUS304# material with special antirust process. In instruction are durable and stable, and sophisticated in appearance.
- \* The easy for use in design of a hand push plate is very convenient and immediate.
- \* Whole set of equipment is just need to provide with water-supplied-tube, and it is fixed and installed easier.
- \* All designs meet with ANSI Z358.1-2014, CNS14251 T2048-1998, DIN 12899

### ■ Suitable Areas

There are dangerous areas about chemical industry, pesticide factory, environmental dust, laboratory, hospital, kitchen, semiconducting material industry and public place.

※All designs meet with ANSI Z358.1-2014,  
CNS14251 T2048-1998, DIN 12899

※BSMI Inspection certificate.



# Standard Emergency Shower and Eyewash



**ESE**

**ESE-H**

	<b>ESE</b>	<b>ESE-H</b>
• Model	<b>ESE</b>	<b>ESE-H</b>
• Dimension	All height = 2350mm Shower height = 2150mm Eyewash height = 1080mm	
• Bore	Supply water : 1-1/4" SUS304# stainless Waste bore : 1-1/4" SUS304# stainless Shower tube : 3/4" SUS304# stainless Eyewash tube : 3/8" SUS304# stainless	
• Connection	Supply water : 1-1/4" D (PT) Waste bore : 1-1/4" D (PT)	
• Spary head	Eyewash head : Nylon material , 50mmx44mm(H) Include two kind filters , with yellow plastic floating cover , Basin dimension Ø345mm Shower head : Nylon material , Dimension Ø200mm	
• Hydraulic pressure	Above 1 kg/cm <sup>2</sup>	
• Action	Shower : A stainless actuator (stay open or close) Eyewash : Hand and foot operated                      Hand push plate with special 8 shape stainless chain	
• Features	1. All tubes are stainless SUS304# material , with special antirust process 2. Included sign (305 x 230mm , Chinese & English language with graph) 3. Meet ANSI Z 358.1-2014 , CNS 14251 T 2048-1998 , Din 12899	

Dimension Error ±2%

■ Curtains Accessories



- Model **SB-1**
- Curtain Frame SUS304# stainless tube
- Curtain Yellow PVC material , 2 sets
- Moving Clip Easy to install or remove
- Fixed Shaft Install parallel or perpendicular to shower stand. Made with SUS304# stainless tube
- Fixed Clip MS plastic material , Include two kinds dimension 70x30 mm & 70x15 mm


■ Standard ESE & Curtains Set



■ Standard ESE & Water Gun




## ■ Curtains Accessories

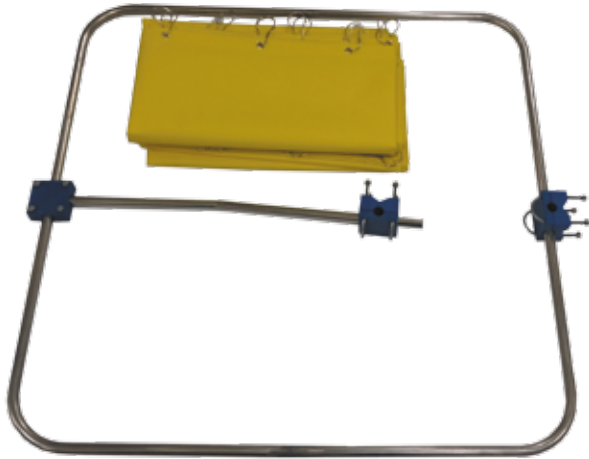

- Model **SB-1**
- Curtain Frame SUS304# stainless tube  
910(W)x910(D)mm
- Curtain Yellow PVC material , 2 sets  
Upper and lower with holes for installing curtain moving and fixing clips, by Velcros on both sides can combine two curtains to attach closely to avoid water splashing.
- Moving Clip Clip can be opened or closed easy to install or remove.
- Location Shaft Stainless SUS304# material, install in a vertical or horizontal position with the shower column pipe
- Fixed Clip MS plastic material, include two kinds of dimension 70x30 mm & 70x15 mm.

## ■ Bottom Drain Pan

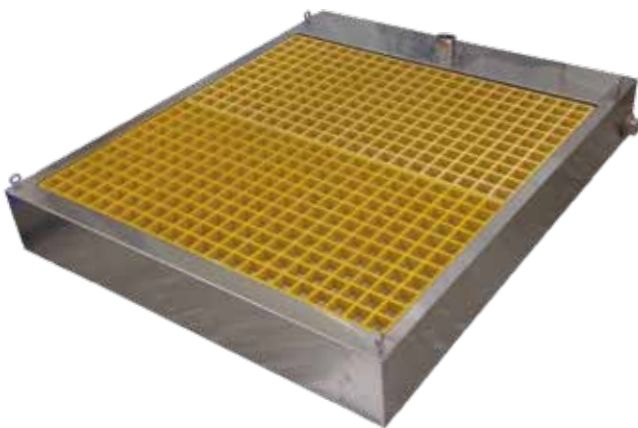

- Model **SK-1** **SK-1F**
- Material SUS304# stainless
- Dimension 910(W)x1060(D)x150(H)mm
- Drain design At the right and left back side, each has 2" drainage hole with removable sieve that is easy to clean.
- Floor top Grid plate , FRP material , two pieces for easy cleaning
- Curtain fixed loop Non There are six sets of curtain fixed loops on the four corners and the middle of back side of the drain pan to fix the curtains
- Curtain fixed clip Non 6 sets of aluminum alloy material for anti-rust, for fixing the curtains on the fixed loop. It can be opened and closed freely, easy for installation and removal.

# Curtain Booth Type Shower & Eyewash(square curtain)



- Model **ESE-SB**
- Bottom Drain Pan SUS304# stainless material  
910(W)x1060(D)x150(H)mm
- All height 2450 mm
- Shower height 2100 mm
- Eyewash height 1140 mm
- Bore  
Supply water : 1-1/4" SUS304# stainless  
Waste bore : 2" SUS304# stainless  
Shower tube : 3/4" SUS304# stainless  
Eyewash tube : 3/8" SUS304# stainless
- Spray head  
Eyewash head : Nylon material ,  
Ø50mm x 44mm ,  
Include two kinds of filter to remove impurities from water flow, with yellow plastic "flip top" dust cover.  
Bowl dimension : Ø345mm.  
SUS304#stainless  
Shower head : SUS304#stainless ,  
DiemnsionØ200mm  
Above 1 kg/cm2
- Hydraulic pressure
- Action  
Shower : A stainless actuator  
Eyewash : Hand push plate
- Floor top  
Grid plate , FRP material , two pieces for easy cleaning.
- Drain design  
At the right and left back side, each has 2" drainage hole with removable sieve that is easy to clean.
- Curtain frame  
SUS304# stainless tube material  
910(W)x 910(D)mm
- Curtain  
Yellow PVC material , 2 sets.  
Upper and lower with holes for installing curtain moving and fixing clips, by Velcros on both sides can combine two curtains to attach closely to avoid water splashing.
- Curtain fixed loop  
6 sets of curtain fixed loops on the four corners and the middle of back side of the drain pan to fix the curtains.
- Curtain fixed clip  
Aluminum alloy material for anti-rust, 6 sets for fixing the curtains on the fixed loop. It can be opened and closed freely, easy for installation and removement.
- Frame moving clip  
Clips can be opened or closed, easy to install/ remove.
- Frame location shaft  
Stainless SUS304# material
- Frame fixed clip  
MS material , include two kinds of dimension 70 x 30mm & 70 x 15mm.
- Sign  
305x230mm , Chinese & English language with graphic.



- Model **ESE-B**
- Sink dimension SUS304# stainless material  
910(W)x1060(D)x150(H)mm
- All height 2450 mm
- Shower height 2040 mm
- Eyewash height 1140 mm
- Bore  
Supply water : 1-1/4" SUS304# stainless  
Waste bore : 2" SUS304# stainless  
Shower tube : 3/4" SUS304# stainless  
Eyewash tube : 3/8" SUS304# stainless
- Spray head  
Eyewash head : Nylon material ,  
Ø50mm x 44mm ,  
Include two kind filters , with yellow plastic floating cover.  
Basin dimension Ø345mm  
Shower head : Nylon material ,  
Diemnsion Ø200mm
- Hydraulic pressure Above 1 kg/cm<sup>2</sup>
- Action  
Shower :A stainless actuator  
Eyewash:Hand push plate
- Floor top Grid pattern , FRP material , two pieces for easy clean job.
- Sink At the right and left side with two 2 inch waste port combined sieve that is easy to clean.
- Curtain Frame Stainless tube SUS304# material
- Curtain Yellow PVC material , 2 sets
- Moving clip Clip can be opened or clased , make up easy.
- Frame fixed tube Stainless SUS304# material
- Frame fixed MS material , include two kinds dimension 70x30mm & 70x15mm
- Sign 305x230mm(Chinese & English language with graph)

# Emergency Shower and Eyewash Station



- | Model                | ESE-R1   | ESE-R2 |
|----------------------|--|--------|
| • Shell material     | SUS304#  | PP     |
| • External dimension | 910(W)x1010(D)x2400(H)mm   |        |
| • Sink               | Material : SUS304# stainless<br>Dimension : 910(W)x1010(D)x150(H)mm  |        |
| • Shower height      | 2150mm   |        |
| • Eyewash height     | 1140mm   |        |
| • Bore               | Supply water : 1-1/4" SUS304# stainless<br>Waste bore : 2" SUS304# stainless<br>Shower tube : 3/4" SUS304# stainless<br>Eyewash tube : 3/8" SUS304# stainless  |        |
| • Spray Head         | Eyewash head : Nylon material<br>Ø50mm x 44mm(H)<br>Include tow kind filters , with yellow plastic floating cover<br>Basin dimension Ø345 mm<br>Shower head : Nylon material<br>Dimension Ø200mm   |        |
| • Hydraulic pressure | Above 1 kg/cm <sup>2</sup>   |        |
| • Action             | Shower : A stainless actuator (stay open or close)<br>Eyewash : Hand and foot operated with special 8 shape stainless chain  |        |
| • Floor top          | Grid pattern , FRP material , two piece for easy clean job   |        |
| • Drain design       | At the right and left back side with two 2" drain port combined sieve that is easy to clean  |        |
| • Sign               | 300x220mm , (Chinese & English language with grap.The signs are pasted on the left side and right side of shell.Additionally, the other sign (480x160mm , Chinese & English language with graph)is fixed on top of the shower & eyewash station. |        |
| • Operation Guide    | 300x210mm , (Chinese & English language with graph) is made of plastic waterproofing material, and it is pasted above the eyewash.   |        |
| • Curtain            | Use is sliding door of white plastic which has translucent windows in two rows, and it is easy to be opened and closed.  |        |





- | • Model              | <b>ESE-R1B</b>  | <b>ESE-R2B</b> |
|----------------------|---|----------------|
| • Shell material     | SUS304#   | PP             |
| • External dimension | 910(W)x1010(D)x2700(H)mm  |                |
| • Shower height      | 2450mm  |                |
| • Eyewash height     | 1140mm  |                |
| • Bore               | Supply water : 1-1/4" SUS304#<br>stainless<br>Waste bore : 1" SCH. 80 UPVC<br>stainless<br>Shower tube : 3/4" SUS304#<br>stainless<br>Eyewash tube : 3/8" SUS304#<br>stainless  |                |
| • Spray head         | Eyewash head : Nylon material ,<br>Ø50mm x 44mm(H) ,<br>Include two kind filters ,<br>with yellow plastic<br>floating cover<br>Basin dimension Ø345mm<br>Shower head : Nylon material ,<br>Dimension Ø200mm   |                |
| • Hydraulic pressure | Above 1 kg/cm <sup>2</sup>  |                |
| • Action             | Shower : A stainless actuator(stay open<br>or close)<br>Eyewash : Hand and foot operated with<br>special 8 shape stainless chain  |                |
| • Sink               | It is made of SUS304# material.Adopt<br>seal welding process in the surrounding<br>of sink  |                |
| • Floor top          | Grid pattern , FRP material , two piece<br>for easy clean job   |                |
| • Sign               | 300x220mm , (Chinese & English<br>language with graph) The signs are pasted<br>on the left and right side of shell<br>Additionally, the other sign(480x160mm,<br>Chinese & English language with graph)<br>is fixed on top of the shower & eyewash<br>station |                |
| • Operation Guide    | 300x210mm (Chinese & English language<br>with graph)is made of plastic waterproofing<br>material, and it is pasted above the eyewash  |                |
| • Curtain            | Use the sliding door of white plastic which<br>has translucent windows in two rows, and it<br>is easy to be opened and closed   |                |
| • Drain pump         | 1/2HP SUS304# matericl , 1Ø 110V ,<br>Head 7M , Flow : 150 LPM  |                |

■ Pedestal-Mounted Eyewash



• Model	<b>EEW-F</b>	<b>EEW-F ( F )</b>
• Eyewash height	1080mm	
• Bore	Supply water : 3/8" , SUS304# stainless Waste bore : 1-1/4" , SUS304# stainless Eyewash tube : 3/8" , SUS304# stainless	
• Spray head	Nylon material , Ø50mm x 44mm(H) , Include two kind filters with yellow plastic floating cover. Basin dimension Ø345mm	
• Hydraulic pressure	Above 1 kg/cm <sup>2</sup>	
• Action	Hand push plate	Hand and foot operated with special 8 shape stainless chain
• Features	All tubes are stainless SUS304# material,with special antirust process Sign ( 150x220mm , Chinese & English language with graph )	

■ Wall-Mounted Eyewash



• Model	<b>EEW-W</b>
• Bore	Supply water : 3/8" , SUS304# stainless Waste bore : 1-1/2" , SUS304# stainless Eyewash tube : 3/8" , SUS304# stainless
• Spray head	Nylon material , Ø50mm x 44mm(H) , Include two kind filters with yellow plastic floating cover Basin dimension Ø345mm
• Hydraulic pressure	Above 1 kg/cm <sup>2</sup>
• Action	Hand push plate
• Features	All tube are stainless SUS304# material, with special antirust process Sign ( 150x220mm , Chinese & English language with graph )

## Wall-Mounted Emergency Shower



- Model **ES-W**
- Bore Supply water : 1-1/4" SUS304# stainless  
Shower tube : 3/4" SUS304# stainless
- Spray head Nylon material , Dimension Ø200mm
- Fixed base Dimension Ø190mm , stainless material
- Hydraulic pressure Above 1 kg/cm<sup>2</sup>
- Action A stainless actuator (stay open or close)
- Features
  - 1.All tubes are stainless SUS304# material , with special antirust process.
  - 2.Include sign (150x 220mm , Chinese & English language with graph)
  - 3.Dimension Error ±2%



## Pedestal-Mounted Emergency Shower

- Model **ES-F**
- Dimension All height = 2250mm  
Shower height = 2120mm
- Bore Supply water : 1-1/4" SUS304# stainless  
Shower tube : 3/4" SUS304# stainless
- Spray head Nylon material  
Dimension Ø200mm
- Hydraulic pressure Above 1 kg/cm<sup>2</sup>
- Action A stainless actuator (stay open or close)
- Features
  - 1.All tubes are stainless SUS304# material , with special antirust process
  - 2.Include sign (150 x 220mm , Chinese & English language with graph)
  - 3.Dimension error ±2%

■ Counter Mounted Drench Hose



**EEW-DM**

- | Model                | EEW-DM   | EEW-DM2 | EEW-WM |
|----------------------|--|---------|--------|
| Sprary head quantity | 1  | 2       | 1      |
| Spray head           | Nylon material , Ø50mmx44mm(H) , Include two kind filters , with yellow plastic floating cover |         |        |



**EEW-DM2**

- Valve body material: Brass body with special process PVDF seal for a avoiding leaking.
- Handle: PVC material
- Fixed base: UPVC material (Iron coating PVC)
- Hose: Yellow PVC hose , Antipressure 500 psi
- Sign: Dimension 220x150mm , (Chinese & English language with graph)
- Supply water: 3/8 inch bore
- Hydraulic pressure: Above 1 kg/cm<sup>2</sup>

■ Wall Mounted Hose Station



**EEW-WM**

- Make up: Fixed the base on table top , and connect the hose to water inlet.
- Action: Push the handle to open water, fixed clip make it continuing working automatically.
- Features: Eyewash spray have a yellow plastic floating cover to avoid dust fall in and prevent second injure in use. Inside the eyewash spray a stainless filter use in reduce hydraulic pressure.



- Model **EEW-D**
- Dimension 205(W)x95(D)x400(H)mm
- Supply water 1/2" Brass tube(PT) bore
- Eyewash tube 1/2" SUS304 # stainless tube
- Eyewash head 3/8" SUS304 # stainless tube bore
- Spray head Nylon material , Ø50mm x 44mm(H) , Include two kind filters , with yellow plastic floating cover
- Action Pull down the Eyewash tube to open the water inlet , push back to close it.
- Valve Brass body with special process , PVDF seal for avoiding leaking.
- Sign Dimension 220x150mm , (Chinese & English language with graph)



# Pull Down Counter Mounted Eyewash Station



- | Model               | EEW-SD   |
|---------------------|--|
| • Dimension         | 120(W)x95(D)x460(H)mm  |
| • Supply water bore | 1/2" Brass tube(PT)  |
| • Eyewash tube bore | 1/2" SUS304 # stainless tube   |
| • Eyewash head bore | 3/8" SUS304 # stainless tube   |
| • Spray head        | Nylon material , Ø50mm x 44mm(H) , include two kinds of filter to remove impurities from water flow , with yellow plastic "flip top" dust cover. |
| • Installation      | According to the location of sink, to adjust the position shaft and install on the left or right side of the sink.                               |
| • Action            | Pull down the eyewash tube to activate the water flow , push back to close the valve.  |
| • Valve             | Brass body with special process , PVDF seal for avoiding leaking.  |
| • Sign              | Dimension 220x150mm , (Chinese & English language with graphic)  |





- Model **EEW-WD**
- Dimension Internal : 500(W)x800(H)x90(D)mm  
Outside : 550(W)x850(H)x100(D)mm
- Material SUS304# stainless material ,  
with special paint process
- Bore Supply water : 1 inch  
Waste bore : 1-1/2 inch  
Shower tube : 3/4 inch  
Eyewash tube : 3/8 inch
- Spary head Eyewash : Nylon material ,  
Ø50mm x 44mm(H)  
Include two kind filters , with  
yellow plastic floating cover  
Shower : Stainless SUS304# material
- Action Eyewash : Plastic hand pull to open the  
door and the water inlet  
Shower : A hand actuator (stay open or close)
- Flow With a flow adjustor for change flow  
adjustment rate to avoid water overflow  
function
- Hydraulic pressure Above 1 kg/cm<sup>2</sup>
- Features
  - 1.All tubes are stainless SUS304#  
material , with special antirust process
  - 2.With service door for make up  
and fix
  - 3.Include sign (Chinese & English  
language with graph)

Wall Recessed Shower



- |                      |   |       |
|----------------------|---|-------|
| • Model              | ES-WD   | ES-RD |
| • Type               | Wall-mounted  | Roof  |
| • Bore               | Supply water : 1-1/4" SUS304# stainless<br>Shower tube : 3/4" SUS304# stainless   |       |
| • Spray head         | SUS304# stainless material  |       |
| • Fixed              | Dimension : Ø190mm , SUS304#  |       |
| • Hydraulic pressure | Above 1 kg/cm <sup>2</sup>  |       |
| • Action             | A stainless actuator  |       |
| • Features           | <ol style="list-style-type: none"> <li>1.All tubes are SUS304# stainless material with special antirust process.</li> <li>2. Sign (150x220mm , Chinese &amp; English language with graph)</li> <li>3.Dimension error ±2%</li> </ol> |       |

Model : ES-WD



Model : ES-RD







## ESE-MSB

- Model
- Bottom Drain Pan SUS304# stainless material  
910(W)x1060(D)x150(H)mm
- All height 2450 mm
- Shower height 2100 mm
- Eyewash height 1140 mm
- Bore  
Supply water : 1-1/4" SUS304# stainless  
Waste bore : 2" SUS304# stainless  
Shower tube : 1-1/4"SUS304# stainless  
Eyewash tube : 3/8" SUS304# stainless
- Spray head  
Eyewash head : Nylon material ,  
Ø50mm x 44mm ,  
Include two kinds of filter to remove impurities from water flow, with yellow plastic "flip top" dust cover.  
Bowl dimension :Ø345mm.  
SUS304# stainless  
Shower head : SUS304#stainless ,  
DimensionØ200mm,  
Ø4.5mmx90holes
- Hydraulic pressure Above 1 kg/cm2
- Action  
Shower : A stainless actuator  
Eyewash : Hand push plate
- Floor top  
Grid plate , FRP material , two pieces for easy cleaning.
- Drain design  
At the right and left back side, each has 2" drainage hole with removable sieve that is easy to clean.
- Caster  
4sets of caster are located at the bottom of drain pan. 2sets of caster are with brake and locked devices, which is easy to move and secure.
- Curtain frame  
SUS304# stainless tube material  
910(W)x 910(D)mm
- Curtain  
Yellow PVC material , 2 sets.  
Upper and lower with holes for installing curtain moving and fixing clips, by Velcros on both sides can combine two curtains to attach closely to avoid water splashing.
- Curtain fixed loop  
6 sets of curtain fixed loops on the four corners and the middle of back side of the drain pan to fix the curtains.
- Curtain fixed clip  
Aluminum alloy material for anti-rust, 6 sets for fixing the curtains on the fixed loop. It can be opened and closed freely,
- Frame moving clip  
Clips can be opened or closed, easy to install/ remove.
- Frame location shaft  
Stainless SUS304# material
- Frame fixed clip  
MS material , include two kinds of dimension 70 x 30mm & 70 x 15mm.  
305x230mm , Chinese & English language with graphic.
- Sign  
easy for installation and removal.



	• Model	<b>EEW-MA</b>
Tank	<ul style="list-style-type: none"> <li>• Material</li> <li>• Dimension</li> <li>• Volume</li> <li>• Safe Valve</li> <li>• Air Gauge</li> <li>• Level Indicator</li> <li>• Wheel</li> <li>• Pressurization Port</li> </ul>	<p>SUS304# stainless material</p> <p>Ø350 x 750 (H) mm</p> <p>60 Liter ( 15 Gallons ) , supply for above 15 mins flushing</p> <p>Brass relief valve automatically opens at 120 psi to prevent vessel over-pressurization</p> <p>Air gauge with easy to read graphic face to simplify tank pressure monitoring</p> <p>Level indicator at the back of tank , you can see the water level from the red part.</p> <p>It is easy to move the equipment , just with the handle at the back , wheel is turn on to everywhere.</p> <p>It is easy to do the pressurization work by compressor or car equipment.</p>
Equipment	<ul style="list-style-type: none"> <li>• Dimension</li> <li>• Eyewash height</li> <li>• Eyewash tube</li> <li>• Spray head bore</li> <li>• Spray head</li> <li>• Action</li> <li>• Actuator</li> </ul>	<p>350(W) x 600(D) x 1200(H) mm</p> <p>1140 mm</p> <p>1/2" SUS304# stainless</p> <p>3/8" SUS304# stainless (PT)</p> <p>Nylon material , Ø50mmX44mm(H) , Include two kind filters , with yellow plastic floating cover</p> <p>Hand push plate</p> <p>1/2" brass valve</p>
Wash Hose	<ul style="list-style-type: none"> <li>• Material</li> <li>• Handle</li> <li>• Hose</li> <li>• Action</li> </ul>	<p>Brass body with PVDF seal for avoiding leaking.</p> <p>PVC material</p> <p>1/4" blue PU hose tube</p> <p>Push the handle to open water , fixed clip make it continuing working automatically</p>

Features

- 1.All tube are stainless SUS304# material , with special antirust process
- 2.Include sign ( 380x600mm , Chinese & English language with graph )

## ■ Nonpressurized Self-contained Eyewash



- Model **EEW-NP**
- Type Nonpressurized self-contained
- Operation Pull down green eyewash panel firmly. Eyewash panel will drop to activate equipment and start the water stream.  
User have to hold eyelids open and roll eyeball let water flow on all surfaces and infolds surrounding eyeball.  
After flushing for 15 mins, push up green eyewash panel to the original place, the water will stop.
- Tank Dimension: 550(W)x550(D)x650(H)mm  
HDPE material, anti UV & against flame
- Volume 80 Liter
- Effective capacity 40L , supply for above 15 mins wash work.
- Eyewash plate Dimension: 204(W)x326(L)x111(H)mm  
HDPE material, anti UV & against flame
- Spray head Nylon material, provide more 1.5L/min water.
- Supply water Input pipe is silicon material with seal for avoiding leaking
- Drain water bore 1/2" PVC pipe. Emissions waste water to sink or waste water bottle.
- Sign Above the equipment  
Dimension : 185(W)x200(H)mm
- Operation instruction Above the equipment left side  
Dimension: 100(W)x250(L)mm
- Maintenance instruction Above the equipment right side  
Dimension: 100(W)x250(L)mm
- Orgcure 500ml, While change the water of equipment once a bottle.

## ■ Accessories

- EEW-NP-MC Roller car  
Dimension: 600(W)x600(D)x750/850(H)mm  
SUS304# stainless material
- EEW-NP-WB Waste liquid bottle  
Dimension: 36x57(H)cm , 46ml  
PE material  
Include drain valve & sign
- Orgcure Preservative additive  
Only for self-contained eyewash , 500ml





**EW-First-1**



**EW-First-2**

**Features**

1. Easy to install  
Choose a suitable place from using screws or components to be wall-mounted.
2. Convenient to use  
The special setting base can be easy to take off eyewash bottle for opening the cover as use at once, and it is efficient to help emergency accident for first step at primary time.
3. Easy to operate  
Setting base and eyewash bottle have items of operation and attention, meanwhile those let the user understand and operated easily.
4. Special design of eyewash bottle  
The design of eyewash bottle sare very conveninet to be held by operators and it is made LDPE material. Bottle can be kept pressing as easy to use, and press the saline solution for emergency wash eye.
5. Convenient to open a cover of eyewash bottle  
A design in cover can be opened at primary time for supporting emergency accident. Furthermore, it is superior to prevent polluting the saline from dust and other matters.



**EW-First-B**

	<b>EW-First-1</b>	<b>EW-First-2</b>
• Model		
• Dimension	220 (W) × 480 (H) × 98 (D) mm	440 (W) × 480 (H) × 98 (D) mm
• Setting base	Adopt to be made of ABS plastic material. The base is convenient to take off eyewash bottle, and prevent the bottle from falling down on the floor.	
• Operating paster	Size : 195x75mm Paster is made of water proof material, in addition it has Chinese/English bilingual edition that includes items of operation and attention for user understand and operation easily.	
• Mirror	None	Size : 98x78mm User is convenient to check their face by themself for umderstand injured situation
• Bottle quantity	One bottle Special design of bottle is convenient for works pressing and flushing the saline solution. LDPE material, 750ml Print the operations and cautions with English edition on bottle for convenient use.	Two bottles



**ES-1**  
Standard Shower head



**ES-1S**  
SUS304# Shower head



**EW-1**  
Eyewash Spray Head



**ESE-3**  
Foot Actuator



**ESE-3S**  
SUS304# Foot Actuator



**ESE-1**  
Shower & Eyewash Sign



**EW-7**  
Eyewash Sign



**ES-5**  
Shower Sign



**ESE-6**  
Emergency Station Sign



**ESE-7**  
Indicate Hang Tag



**SK-1**  
Sink



**SK-2**  
FRP Grid Pattern



**SK-3**  
P P Grid Pattern



**EW-2**  
Standard Basin




**EW-2S**  
SUS304# Basin



**EW-8**  
Standard Water Gun



**EW-9**  
Simple Water Gun

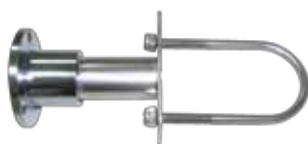

**ESE-8**  
Anti-sway holder





**ESE-5H**  
Hand push plate



**ESE-5**  
Hand push plate



# ENSHINE SCIENTIFIC CORPORATION

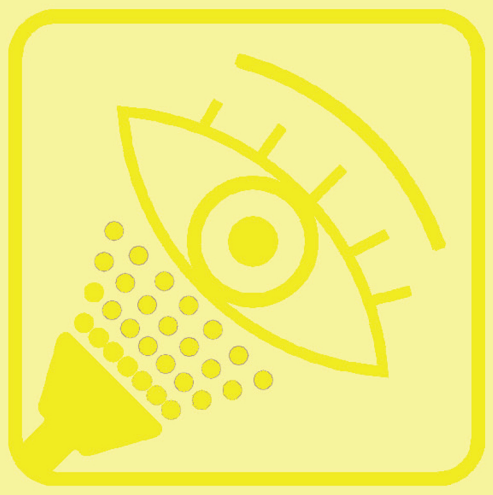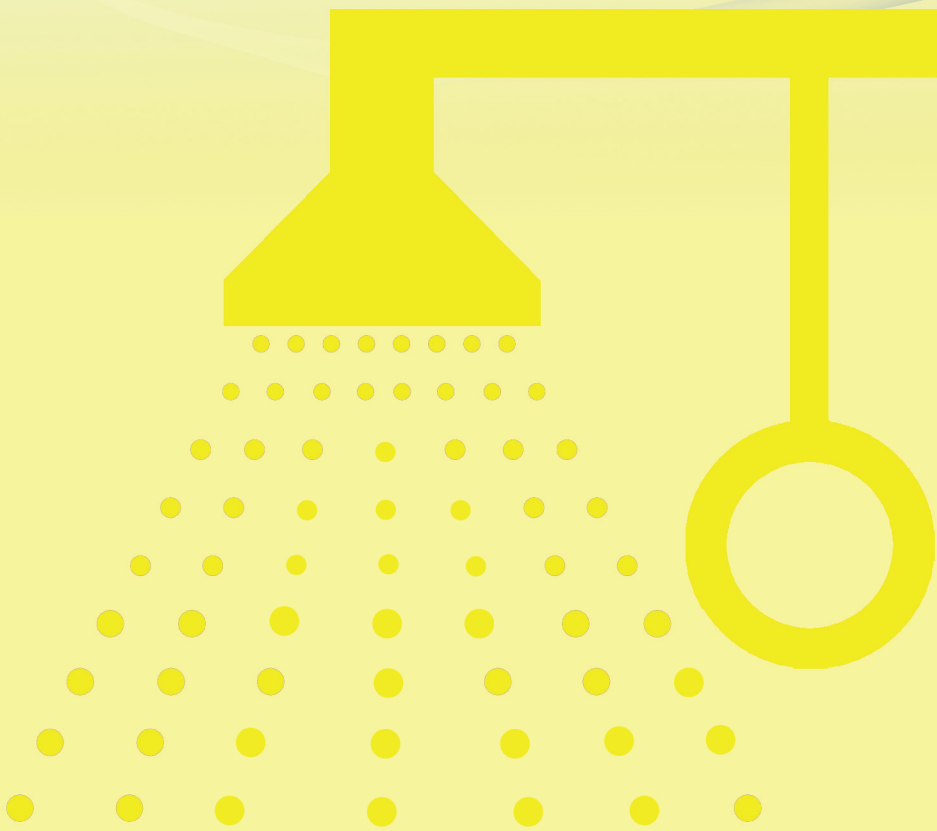

**Distributor**